


Quick TeeJet Multiple Nozzle Body Assemblies



For Dry Booms

QJ360C Nozzle Body Series for Dry Booms

- Available with either 3, 4 or 5 spray positions for easy change of spray tips or quick boom flushing.
- Positive shutoff between each spray position.
- Automatic spray alignment using flat fan spray tips.
- Maximum operating pressure of 300 PSI (20 bar).
- Available in 1/2", 3/4" or 1" single or double hose shanks.
- Includes ChemSaver® diaphragm check valve for drip-free shutoff. Standard diaphragm opens at 10 PSI (0.7 bar).
- Standard EPDM diaphragm with Viton® available as an option.
- Also available with optional 56720 Air ChemSaver or 55280 e-ChemSaver® shutoff valves.
- Durable design mounts body high on boom structure for maximum protection.
- Flow Rate: 2.25 GPM (8.5 l/min) with 5 PSI (0.34 bar) pressure drop, 3.18 GPM (12.0 l/min) with 10 PSI (0.69 bar) pressure drop.
- Mounts to a 3/8" (9.5 mm) hole drilled in pipe or tubing.
- Molded hex socket in upper clamp for attaching to flat surfaces. Accepts 5/16" or M8 bolt.
- Hinged upper clamp reduces assembly time and fits inside common boom channels.

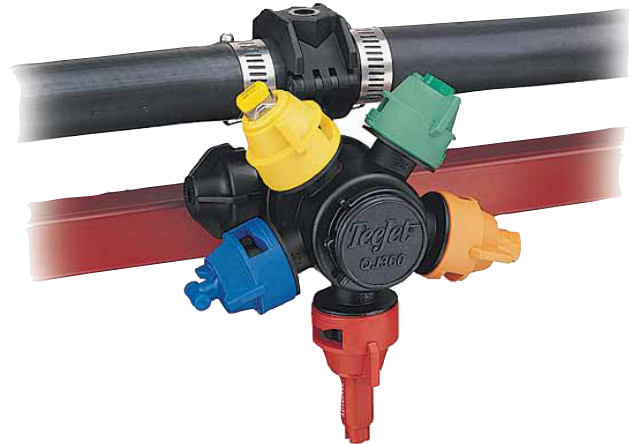

PART NUMBER		NUMBER OF SPRAY OUTLETS	TO FIT HOSE I.D.
SINGLE	DOUBLE		
QJ363C-500-1-NYB	QJ363C-500-2-NYB	3	1/2"
QJ363C-750-1-NYB	QJ363C-750-2-NYB	3	3/4"
QJ363C-1000-1-NYB	QJ363C-1000-2-NYB	3	1"



QJ363C

PART NUMBER		NUMBER OF SPRAY OUTLETS	TO FIT HOSE I.D.
SINGLE	DOUBLE		
QJ364C-500-1-NYB	QJ364C-500-2-NYB	4	1/2"
QJ364C-750-1-NYB	QJ364C-750-2-NYB	4	3/4"
QJ364C-1000-1-NYB	QJ364C-1000-2-NYB	4	1"



QJ364C

PART NUMBER		NUMBER OF SPRAY OUTLETS	TO FIT HOSE I.D.
SINGLE	DOUBLE		
QJ365C-500-1-NYB	QJ365C-500-2-NYB	5	1/2"
QJ365C-750-1-NYB	QJ365C-750-2-NYB	5	3/4"
QJ365C-1000-1-NYB	QJ365C-1000-2-NYB	5	1"



QJ365C

Quick TeeJet Multiple Nozzle Body Assemblies



Triple Nozzle Body

- Designed to greatly simplify changing spray tips in the field.
- Provides three spray positions for easy change of spray tips or quick boom flushing.
- Positive shutoff between each spray position.
- Includes ChemSaver® diaphragm check valve for drip-free shutoff. Opens at 10 PSI
- Standard EPDM diaphragm with Viton® available as an option.
- Can be used with all Quick TeeJet caps.
- Nylon body.
- Maximum operating pressure of 125 PSI (9 bar).
- Available in 1/2" and 3/4" single, double or triple hose shanks.
- Flow Rate: 1.6 GPM (6.0 l/min) at 5 PSI (0.34 bar) pressure drop, 2.26 GPM (8.6 l/min) at 10 PSI (0.69 bar) pressure drop.



24230A

PART NUMBER			TO FIT HOSE
SINGLE	DOUBLE	TRIPLE	
24230A-1-540-NYB	24230A-2-540-NYB	24230A-3-540-NYB	1/2"
24230A-1-785-NYB	24230A-2-785-NYB	24230A-3-785-NYB	3/4"

With Fertilizer Outlets for Dry Booms

- Single fertilizer nozzle outlet with shutoff cap and either 3, 4, or 5 spray positions for easy change of spray tips or quick boom flushing.
- Positive shutoff between each position.
- Automatic self-alignment w/flat fan spray patterns.
- Flow rate: pressure drop of 5 PSI (0.34 bar) for 2.25 GPM (8.5 l/min) through turret and 3.4 GPM (12.9 l/min) through fertilizer outlet.
- Flow rate: pressure drop of 10 PSI (0.69 bar) for 3.18 GPM (12.0 l/min) through turret and 4.8 GPM (18.2 l/min) through fertilizer outlet.
- Maximum pressure of 300 PSI (20 bar).
- Available in 1" single or double hose shanks.
- Includes ChemSaver diaphragm check valve for drip-free shutoff. Standard diaphragm opens at 10 PSI (0.7 bar).
- Standard O-rings and diaphragm made of EPDM and Buna with Viton optional.
- Molded hex socket in the upper clamp for attaching to flat surfaces (does not use dry boom clamp). Accepts 5/16" or M8 bolt.
- Also available with optional 56720 Air ChemSaver or 55280 e-ChemSaver® shutoff valves.
- Hinged upper clamp reduces assembly time and fits inside common boom channels.



QJ363F



QJ364F



QJ365F

PART NUMBER		NUMBER OF SPRAY OUTLETS	TO FIT HOSE I.D.
SINGLE	DOUBLE		
QJ363F-1000-1-NYB	QJ363F-1000-2-NYB	3 + 1	1"
QJ364F-1000-1-NYB	QJ364F-1000-2-NYB	4 + 1	
QJ365F-1000-1-NYB	QJ365F-1000-2-NYB	5 + 1	

Quick TeeJet Single Nozzle Bodies





For Dry Booms




QJ100 Series Quick TeeJet Nozzle Body

- Hose barb sizes for 3/8", 1/2" or 3/4" I.D. hose.
- Maximum operating pressure of 125 PSI (9 bar).

	PART NUMBER SINGLE		TO FIT HOSE I.D.
		18635-111-406-NYB	
	18638-111-540-NYB		1/2"
	18719-111-785-NYB		3/4"

	PART NUMBER DOUBLE		TO FIT HOSE I.D.
		18636-112-406-NYB	
	18639-112-540-NYB		1/2"
	18720-112-785-NYB		3/4"


	PART NUMBER TRIPLE		TO FIT HOSE I.D.
		18637-113-406-NYB	
	18640-113-540-NYB		1/2"
	18721-113-785-NYB		3/4"




QJ300 Series Top Diaphragm Check Valve Quick TeeJet Nozzle Assemblies

- Drip-free shutoff with TeeJet ChemSaver. Opens at 10 PSI (0.7 bar). Standard diaphragm is EPDM with Viton optional.
- Maximum operating pressure of 300 PSI (20 bar).
- Flow rate: 2.25 GPM (8.5 l/min) at 5 PSI (0.34 bar) pressure drop, 3.18 GPM (12.0 l/min) at 10 PSI (0.69 bar) pressure drop.

QJ300 Series is also available in polypropylene. Maximum operating pressure is 150 PSI (10 bar).

	PART NUMBER SINGLE		TO FIT HOSE I.D.
		22251-311-375-NYB	
	22251-311-500-NYB		1/2"
	22251-311-750-NYB		3/4"


	PART NUMBER DOUBLE		TO FIT HOSE I.D.
		22252-312-375-NYB	
	22252-312-500-NYB		1/2"
	22252-312-750-NYB		3/4"




QJ200 Series Side Diaphragm Check Valve Quick TeeJet Nozzle Assemblies

- Drip-free shutoff with TeeJet ChemSaver®. Opens at 10 PSI (0.7 bar). Standard diaphragm is EPDM w/Viton® optional.
- Maximum operating pressure of 125 PSI (9 bar).
- Flow rate: 2.25 GPM (8.5 l/min) at 5 PSI (0.34 bar) pressure drop, 3.18 GPM (12.0 l/min) at 10 PSI (0.69 bar) pressure drop.


	PART NUMBER SINGLE		TO FIT HOSE I.D.
		19349-211-406-NYB	
	19349-211-540-NYB		1/2"
	19349-211-785-NYB		3/4"

	PART NUMBER DOUBLE		TO FIT HOSE I.D.
		19350-212-406-NYB	
	19350-212-540-NYB		1/2"
	19350-212-785-NYB		3/4"

	PART NUMBER TRIPLE		TO FIT HOSE I.D.
		19351-213-406-NYB	
	19351-213-540-NYB		1/2"
	19351-213-785-NYB		3/4"

TeeJet Vari-Spacing Clamps


For Use on Dry Boom Quick TeeJet Bodies



QJ111



QJ111HP



QJ111SQ

PART NUMBER PLATED STEEL	TO FIT
QJ111-1/2	1/2" Pipe (13/16" & 7/8" O.D. Tubings)
QJ111-3/4	3/4" Pipe (1" & 1-1/16" O.D. Tubings)
QJ111-1	1" Pipe (1-1/8", 11/4" & 1-3/8" O.D. Tubings)
QJ111-1-1/4	1-1/4" Pipe (1-9/16" & 1-11/16" O.D. Tubings)
QJ111HP	3/4" Pipe (1" & 1-1/16" O.D. Tubings)

PART NUMBER PLATED STEEL	TO FIT
QJ111SQ-3/4	3/4" Square Tubing
QJ111SQ-1	1" Square Tubing
QJ111SQ-1-1/4	1-1/4" Square Tubing
QJ111SQ-1-1/2	1-1/2" Square Tubing

Quick TeeJet Multiple Nozzle Bodies



QC360 Quick TeeJet® Nozzle Body with Cam Lever Coupling Adapter

- Same features as QJ360C multiple nozzle bodies.
- Body designed to fit into standard cam lever couplings allowing for quick change to smaller capacity spray tips.
- Locating nib keeps body properly oriented in fitting.
- Flow Rate: 2.25 GPM (8.5 l/min) at 5 PSI (0.34 bar) pressure drop, 3.18 GPM (12.0 l/min) at 10 PSI (0.69 bar) pressure drop.
- 1.269 (32 mm) diameter tip body fits 3/4" cam lever coupling.

PART NUMBER	NUMBER OF SPRAY OUTLETS
QC363-NYB	3
QC364-NYB	4
QC365-NYB	5



QC363



QC364



QC365

QJ360C Nozzle Body Series for Wet Booms

- Available with either 3, 4 or 5 spray positions
- Positive shutoff between each position.
- Maximum operating pressure of 300 PSI (20 bar).
- Available in 20 mm, 25 mm, 1/2", 3/4" or 1" pipe connections.
- Includes ChemSaver® diaphragm check valve for drip-free shutoff. Standard diaphragm opens at 10 PSI (0.7 bar).
- Standard EPDM diaphragm with Viton® available as an option.
- Also available with optional 56720 Air ChemSaver or 55280 e-ChemSaver® shutoff valves.
- Flow Rate: 2.25 GPM (8.5 l/min) at 5 PSI (0.34 bar) pressure drop, 3.18 GPM (12.0 l/min) w/10 PSI (0.69 bar) pressure drop.
- Mounts to a 3/8" (9.5 mm) hole drilled in pipe or tubing.
- Molded hex socket in upper clamp for attaching to flat surfaces. Accepts 5/16" or M8 bolt.



QJ363C



QJ364C



QJ365C

PART NUMBER	NUMBER OF SPRAY OUTLETS	TO CLAMP ON	PART NUMBER	NUMBER OF SPRAY OUTLETS	TO CLAMP ON	PART NUMBER	NUMBER OF SPRAY OUTLETS	TO CLAMP ON
QJ363C-1/2-NYB	3	1/2" Pipe	QJ364C-1/2-NYB	4	1/2" Pipe	QJ365C-1/2-NYB	5	1/2" Pipe
QJ363C-3/4-NYB	3	3/4" Pipe	QJ364C-3/4-NYB	4	3/4" Pipe	QJ365C-3/4-NYB	5	3/4" Pipe
QJ363C-1-NYB	3	1" Pipe	QJ364C-1-NYB	4	1" Pipe	QJ365C-1-NYB	5	1" Pipe

Quick TeeJet Triple Nozzle Bodies



For Wet Booms

24216A-NYB

- Can be mounted to 20 mm, 1/2", 3/4" or 1" pipe or equivalent size tubing.
- Provides three spray positions for easy change of spray tips.
- Shutoff position provided between each spray position.
- Features ChemSaver® drip-free shutoff. Requires 10 PSI (0.7 bar) at the nozzle to open check valve.
- Standard diaphragm of EPDM with optional Viton® available.
- Maximum operating pressure of 150 PSI (10 bar).
- 1/2" and 3/4" sizes include mounting hole in upper clamp subassembly for attachment to flat surfaces.
- Mounts to a 3/8" (9.5 mm) or 9/32" (7.0 mm) hole drilled in pipe or tubing.
- Flow rate: 1.6 GPM (6.1 l/min) at 5 PSI (0.34 bar) pressure drop, 2.26 GPM (8.6 l/min) at 10 PSI (0.69 bar) pressure drop.

PART NUMBER	TO CLAMP ON	DRILL HOLE SIZE	UPPER CLAMP BOLT SIZE
24216A-1/2-NYB	1/2" Pipe	.375" (9.5 mm)	1/4"
24216A-3/4-NYB	3/4" Pipe	.375" (9.5 mm)	1/4"
24216A-1-NYB	1" Pipe	.375" (9.5 mm)	N/A



24216A

Multiple Nozzle Bodies with Fertilizer Outlets for Wet Booms

- Single fertilizer nozzle outlet with shutoff cap and either 3, 4 or 5 spray positions for easy change of spray tips or quick boom flushing.
- Positive shutoff between each position.
- Automatic self-alignment with flat fan spray patterns.
- Flow rate: 2.25 GPM (8.5 l/min) with 5 PSI (0.34 bar) pressure drop through turret and 3.4 GPM (12.9 l/min) through fertilizer outlet.
- Flow rate: 3.18 GPM (12.0 l/min) with 10 PSI (0.69 bar) pressure drop through turret and 4.8 GPM (18.2 l/min) through fertilizer outlet.
- Maximum pressure of 300 PSI (20 bar).
- Available in 1" pipe connections and mounts with a 3/8" (9.5 mm) hole drilled in pipe or tubing.
- Includes ChemSaver® diaphragm check valve for drip-free shutoff. Standard diaphragm opens at 10 PSI (0.7 bar).
- Standard O-rings and diaphragm made of EPDM and Buna with Viton® optional.
- Hinged upper clamp reduces assembly time and fits inside common boom channels.
- Also available with optional 56720 Air ChemSaver or 55280 e-ChemSaver® shutoff valves,
- Molded hex socket in the upper clamp for attaching to flat surfaces. Accepts 5/16" or M8 bolt.



PART NUMBER	NUMBER OF SPRAY OUTLETS	TO CLAMP ON
QJ363F-1-NYB	3 + 1	1" Pipe
QJ364F-1-NYB	4 + 1	1" Pipe
QJ365F-1-NYB	5 + 1	1" Pipe



QJ363F



QJ364F



QJ365F

Quick TeeJet Multiple Nozzle Bodies



For Wet Booms

QJ380 High Flow Nozzle Body

- High capacity multiple outlet nozzle body is ideal for high speed, high volume applications including liquid fertilizer.
- Available with 3 spray positions for easy change of spray tips or quick boom flushing.
- Positive shutoff between each spray position.
- Automatic spray alignment when using flat fan spray tips.
- Maximum operating pressure of 150 PSI (10 bar).
- Available in 3/4" or 1" pipe size.
- Requires 3/8" (9.5 mm) hole drilled in pipe or tubing.
- Includes high capacity ChemSaver® diaphragm check valve for drip-free shutoff. Diaphragm opens at 10 PSI (0.7 bar).
- 3.0 GPM (11.4 l/min) flow rate at a 5 PSI (0.34 bar) pressure drop.
- Molded hex socket in upper clamp for attaching to flat surfaces. Accepts 5/16" or M8 bolt.
- Hinged upper clamp reduces assembly time and fits inside common boom channels.
- Constructed of nylon and acetal with Viton® seals and O-rings.



QJ380

PART NUMBER	NUMBER OF SPRAY OUTLETS	TO CLAMP ON
QJ383-3/4-NYB	3	3/4" Pipe
QJ383-1-NYB	3	1" Pipe

QJ380 High Flow Nozzle Body with Fertilizer Outlet

- Same features as standard QJ380, with an additional higher flow outlet on bottom of body.
- Additional outlet can be used for very high flow applications such as liquid fertilizer.
- Flow rate through fertilizer outlet is 4.5 GPM (17.0 l/min) at 5 PSI (0.34 bar) pressure drop.



QJ383F

PART NUMBER	NUMBER OF SPRAY OUTLETS	TO CLAMP ON
QJ383F-3/4-NYB	3 + 1	3/4" Pipe
QJ383F-1-NYB	3 + 1	1" Pipe

CP98488-VI Hi-Flow Nozzle Body Adapter Insert

Reduces 11/169 (17.5mm) wet boom inlet hole to 3/89 (9.5mm). Allows QJ380 nozzle body to be used in place of non-TeeJet high-flow wet boom nozzle bodies.



CP98488-VI

Quick TeeJet QJS Series Stackable Nozzle Bodies



The QJS nozzle body utilizes a modular design that allows for highly customized solutions to best fit your sprayer and spraying application needs. Choose the boom size, inlet position, outlet arrangement and tip shutoff mechanism that works best.

- Multiple outlet, stackable nozzle body is ideal for mounted, trailed and self-propelled sprayers.
- Wet boom configuration offered with choice of bottom or side inlet in five different boom diameters (1/29, 3/49, 19, 20mm and 25mm); dry boom version also available in three sizes (1/29, 3/49, 19).
- Can be equipped with any combination of TeeJet ChemSaver® tip shutoffs including pneumatic, electric, manual or spring-loaded check valve.
- Wetted parts are nylon and Viton.
- Max operating pressure of up to 300 PSI (20 bar) depending on the ChemSaver used.
- Flow rating of up to 2.75 GPM (10.4 l/min) at 5 PSI (0.34 bar) pressure drop and 4.0 GPM (15.1 l/min) at 10 PSI (0.7 bar) pressure drop depending on ChemSaver used.

NEW!



QJS-B3-AAA

BOOM COMPONENTS

QJS-T4R-750-L-AAAA

OUTLET CONFIGURATION	
S0	Side Inlet, Stacked Bodies, Split Eyelet Only
S1	Side Inlet, Stacked Bodies, 1 Outlet
S2	Side Inlet, Stacked Bodies, 2 Outlets
B0	Side Inlet, Stacked Bodies, Split Eyelet Only with Plug
B1	Bottom Inlet, Stacked Bodies, 1 Outlet
B2	Bottom Inlet, Stacked Bodies, 2 Outlets
B3	Bottom Inlet, Stacked Bodies, 3 Outlets
T3	Bottom Inlet, Parallel Bodies, 3 Outlets Parallel to Boom
T4	Bottom Inlet, Parallel Bodies, 4 Outlets Including Outlet Below Boom
T4R	Bottom Inlet, Parallel Bodies, 4 Outlets Parallel to Boom, Additional Outlet on Right Side
T4L	Bottom Inlet, Parallel Bodies, 4 Outlets Parallel to Boom, Additional Outlet on Left Side

PIPE/HOSE SIZE	
20 mm	20 mm Tubing
25 mm	25 mm Tubing
½	½" Pipe
¾	¾" Pipe
1	1" Pipe
500	½" Hose Barb
750	¾" Hose Barb
1000	1" Hose Barb

SHUTOFF TYPE FOR EACH POSITION	
C	Standard ChemSaver®
M	Manual ChemSaver
E	e-ChemSaver® (12 VDC)*
V	e-ChemSaver (24 VDC)*
A	Air ChemSaver
Blank	No ChemSaver

DRY BOOM ORIENTATION	
L	Single Hose Barb Left Orientation
R	Single Hose Barb Right Orientation
2	Double Hose Barb
Blank	Wet Boom

Note: First position of e-ChemSaver is location nearest to the pipe.

*Preferred position of e-ChemSaver is location nearest to the pipe.

Quick TeeJet Single Nozzle Bodies



For Wet Booms



QJ22187-NYB

QJ22187-NYB

- Can be mounted to 1/2", 3/4", 1" pipe or equivalent size tubing.
- 1/2" and 3/4" sizes include a mounting hole in clamp subassembly for mounting to flat surfaces.
- Allows side mounting to flat surface for protection of body.
- Features ChemSaver drip-free shutoff. Requires 10 PSI (0.7 bar) at the nozzle to open check valve.

- Standard diaphragm of EPDM w/optional Viton available.
- Mounts to a 3/8" (9.5 mm) hole drilled in pipe or tubing.
- Maximum operating pressure of 300 PSI (20 bar).

- Flow rate: 2.5 GPM (9.5 l/min) at 5 PSI (0.34 bar) pressure drop, 3.54 GPM (13.4 l/min) at 10 PSI (0.69 bar) pressure drop.

PART NUMBER	TO CLAMP ON	DRILL HOLE SIZE	UPPER CLAMP BOLT SIZE
QJ22187-1/2-NYB	1/2" Pipe	.375" (9.5 mm)	1/4"
QJ22187-3/4-NYB	3/4" Pipe	.375" (9.5 mm)	1/4"
QJ22187-1-NYB	1" Pipe	.375" (9.5 mm)	N/A



QJ17560A-NYB

QJ17560A-NYB

- Can be mounted to 20 mm, 25 mm, 1/2", 3/4" or 1" pipe or equivalent size tubing.
- Features ChemSaver drip-free shutoff. Requires 10 PSI (0.7 bar) at the nozzle to open check valve.
- Standard diaphragm of EPDM with optional Viton available.
- Mounts to a 3/8" (9.5 mm) or 9/32" (7.0 mm) hole drilled in pipe or tubing.

- All sizes include a mounting hole in upper clamp subassembly for mounting to flat surfaces.
- Maximum operating pressure of 300 PSI (20 bar).

- Flow rate: 2.25 GPM (8.5 l/min) at 5 PSI (0.34 bar) pressure drop, 3.18 GPM (12.0 l/min) at 10 PSI (0.69 bar) pressure drop.

PART NUMBER	TO CLAMP ON	DRILL HOLE SIZE	UPPER CLAMP BOLT SIZE
QJ17560A-1/2-NYB	1/2" Pipe	.375" (9.5 mm)	5/16" or M8
QJ17560A-3/4-NYB	3/4" Pipe	.375" (9.5 mm)	5/16" or M8
QJ17560A-1-NYB	1" Pipe	.375" (9.5 mm)	5/16" or M8



QJ7421-NYB

QJ7421-NYB

- Can be mounted to 1/2", 3/4" or 1" pipe or equivalent size tubing.
- 1/2" and 3/4" sizes include a mounting hole in upper clamp subassembly for mounting to flat surfaces.
- Mounts to a 3/8" (9.5mm) hole drilled in pipe or tubing.

- Maximum operating pressure of 300 PSI (20 bar).

PART NUMBER	TO CLAMP ON	DRILL HOLE SIZE	UPPER CLAMP BOLT SIZE
QJ7421-1/2-NYB	1/2" Pipe	.375" (9.5 mm)	1/4"
QJ7421-3/4-NYB	3/4" Pipe	.375" (9.5 mm)	1/4"
QJ7421-1-NYB	1" Pipe	.375" (9.5 mm)	N/A

Quick TeeJet Push to Connect Caps and Bodies



NEW!

- Fittings feature push to connect couplers for fast, easy, leak-free assembly.
- Offered in body, straight cap, 90° fixed cap and 90° swivel cap.
- Accepts plastic and soft metal tubing.
- Commonly used for liquid fertilizer application systems on planters and toolbars.
- Maximum operating pressure of 100 PSI (7 bar).
- Caps include CP18999-EPR gasket.

How to order:

Specify model number.
Example: QJ98595-1/4-*

Body & Cap Assembly



Body



Straight Cap



Swivel Cap



90° Caps



PART NUMBER	TUBING SIZE (OD)	DESCRIPTION
QJ98595-1/4-*	1/4"	Straight Cap & Body
QJ114401-5/16-*	5/16"	Straight Cap & Body
QJ98594-3/8-*	3/8"	Straight Cap & Body
QJ98592-1/4-*	1/4"	Body
QJ114400-5/16-*	5/16"	Body
QJ98590-3/8-*	3/8"	Body
QJ98588-1/4	1/4"	Straight Cap
QJ114398-5/16	5/16"	Straight Cap
QJ98586-3/8	3/8"	Straight Cap
QJ98598-90-1/4	1/4"	90° Fixed Cap
QJ98599-90-3/8	3/8"	90° Fixed Cap
QJ114403-1/4	1/4"	90° Swivel Cap
QJ114404-5/16	5/16"	90° Swivel Cap
QJ114405-3/8	3/8"	90° Swivel Cap
QJ114430-1/4-*	1/4"	Capless Body, PTC In & PTC Out
QJ114432-5/16-*	5/16"	Capless Body, PTC In & PTC Out
QJ114434-3/8-*	3/8"	Capless Body, PTC In & PTC Out

QuickJet TeeJet Caps

Color Code: 1 2 3 4 5 6 7 8 10
 Black White Red Blue Green Yellow Brown Orange Violet

CAP COLOR	RETIRED NYLON (GASKET AND CAP)	NEW CELCON (GASKET AND CAP)	RETIRED NYLON (CAP ONLY)	NEW CELCON (CAP ONLY)	RETIRED NYLON CAP	NEW CELCON CAP
BLACK	25612-1-NYR	114441-1-CELR	CP25611-1-NY	CP114440-1-CE		
WHITE	25612-2-NYR	114441-2-CELR	CP25611-2-NY	CP114440-2-CE		
RED	25612-3-NYR	114441-3-CELR	CP25611-3-NY	CP114440-3-CE		
BLUE	25612-4-NYR	114441-4-CELR	CP25611-4-NY	CP114440-4-CE		
GREEN	25612-5-NYR	114441-5-CELR	CP25611-5-NY	CP114440-5-CE		
YELLOW	25612-6-NYR	114441-6-CELR	CP25611-6-NY	CP114440-6-CE		
BROWN	25612-7-NYR	114441-7-CELR	CP25611-7-NY	CP114440-7-CE		
ORANGE	25612-8-NYR	114441-8-CELR	CP25611-8-NY	CP114440-8-CE		
GREY	N/A	114441-9-CELR	N/A	CP114440-9-CE		
VIOLET	25612-10-NYR	114441-10-CELR	CP25611-10-NY	CP114440-10-CE		
BLACK	25598-1-NYR	114443-1-CELR	CP25597-1-NY	CP114442-1-CE		
WHITE	25598-2-NYR	114443-2-CELR	CP25597-2-NY	CP114442-2-CE		
RED	25598-3-NYR	114443-3-CELR	CP25597-3-NY	CP114442-3-CE		
BLUE	25598-4-NYR	114443-4-CELR	CP25597-4-NY	CP114442-4-CE		
GREEN	25598-5-NYR	114443-5-CELR	CP25597-5-NY	CP114442-5-CE		
YELLOW	25598-6-NYR	114443-6-CELR	CP25597-6-NY	CP114442-6-CE		
BROWN	25598-7-NYR	114443-7-CELR	CP25597-7-NY	CP114442-7-CE		
ORANGE	25598-8-NYR	114443-8-CELR	CP25597-8-NY	CP114442-8-CE		
GREY	N/A	114443-9-CELR	N/A	CP114442-9-CE		
VIOLET	25598-10-NYR	114443-10-CELR	CP25597-10-NY	CP114442-10-CE		
BLACK	25608-1-NYR	114445-1-CELR	CP25607-1-NY	CP114444-1-CE		
WHITE	25608-2-NYR	114445-2-CELR	CP25607-2-NY	CP114444-2-CE		
RED	25608-3-NYR	114445-3-CELR	CP25607-3-NY	CP114444-3-CE		
BLUE	25608-4-NYR	114445-4-CELR	CP25607-4-NY	CP114444-4-CE		
GREEN	25608-5-NYR	114445-5-CELR	CP25607-5-NY	CP114444-5-CE		
YELLOW	25608-6-NYR	114445-6-CELR	CP25607-6-NY	CP114444-6-CE		
BROWN	25608-7-NYR	114445-7-CELR	CP25607-7-NY	CP114444-7-CE		
ORANGE	25608-8-NYR	114445-8-CELR	CP25607-8-NY	CP114444-8-CE		
GREY	25608-9-PP	114445-9-CELR	CP25607-9-PP	CP114444-9-CE		
VIOLET	N/A	114445-10-CELR	N/A	CP114444-10-CE		
BLACK	19843-NYR	114447-1-CELR	N/A	N/A		


* Cap gasket combo can be ordered with Viton gasket by using CELVI as the material code.

* Specify color code (see chart). Violet (10) only available in CP25611 and CP25597 Nylon caps.

† These Quick TeeJet caps available only in black.

†† Polypropylene Quick TeeJet caps available only in gray and rated to 150 PSI (10 bar). Nylon caps not available in gray.

The Quick TeeJet caps are designed with grooves that fit locating lugs on the nozzle body. Caps are made of Nylon and are available for use with all TeeJet® spray tips. Maximum operating pressure of 300 PSI (20 bar).

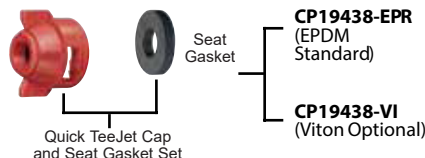

How to Order:

For cap and seat gasket set, specify set number and color code.

Example: 25612-3-NYR

For cap only, specify part number and color code.

Example: CP25597-4-NY

For seat gasket, specify part number.

Example: CP19438-EPR

Stockton, CA
800-922-7253

Fresno, CA
800-532-0253

Salinas, CA
844-755-2410

Yuma, AZ
800-752-2636

Adapters and Accessories



55240-CELR

- Converts Hardi® snap-fit nozzle body connection to Quick TeeJet connection for easy installation of TeeJet tips. Especially useful for AIC, XRC and SJ7 tips.
- Acetal construction with EPDM gasket for durability and chemical resistance.
- Accepts standard tip strainers.
- Maximum operating pressure of 150 PSI (10 bar).



55240-CELR

QJ1/4T-NYB & QJT-NYB

- QJ1/4T-NYB allows use of Quick TeeJet system with 1/4" NPT and BSPT male connections.
- QJT-NYB permits use of Quick TeeJet system with standard 11/16"-16 TeeJet thread.
- Maximum operating pressure of 300 PSI (20 bar).



**QJ1/4T-NYB
QJT-NYB**

PART NUMBER	TO FIT
QJ1/4T-NYB	1/4" (F) thread
QJT-NYB	11/16"-16 TeeJet thread

QJ1/4TT-NYB

- Allows use of Quick TeeJet system with 1/4" NPT and BSPT female connections.
- Maximum operating pressure of 300 PSI (20 bar).



QJ1/4TT-NYB

PART NUMBER	TO FIT
QJ1/4TT-NYB	1/4" (M) thread

50854-NYB

- For use with Quick TeeJet nozzle bodies to extend body length by 1 inch (25 mm).
- Used to eliminate interference of spray pattern with sprayer boom structure or shields, particularly with twin pattern or fertilizer spray tips.
- Nylon body construction with EPDM gasket.
- Maximum operating pressure of 300 PSI (20 bar).



50854-NYB

**QJP19011-NYB,
QJ8360-NYB**

- Retrofits to a Quick TeeJet system.
- Features ChemSaver® no-drip shutoff. Requires 10 PSI (0.7 bar) at the nozzle to open check valve.
- Standard diaphragm of EPDM with optional Viton® available upon request.
- Maximum operating pressure of 300 PSI (20 bar).
- Flow rate: 2.25 GPM (8.5 l/min) at 5 PSI (0.34 bar) pressure drop, 3.18 GPM (12.0 l/min) at 10 PSI (0.69 bar) pressure drop.



QJ8360-NYB



**QJT8360-NYB
QJP19011-NYB**

PART NUMBER	TO FIT
QJ8360-NYB	1/4" (F) thread
QJT8360-NYB	1/16"-16 TeeJet thread
QJP19011-NYB	3/8" BSPP thread

QJ90-1-NYR

- Fits standard Quick TeeJet bodies.
- Nylon body construction for strength and durability, with EPDM gasket (Viton® optional).
- Outlet can be fitted with Quick TeeJet caps and TeeJet spray tips.
- One piece, 90° elbow is ideal for installation of TK-VS FloodJet® and TF-VS or TF-VP Turbo FloodJet nozzles on single or multiple outlet nozzle bodies. Proper orientation of spray tip enhances spray distribution quality.
- Adapter outlet accepts standard tip strainers.
- Maximum operating pressure of 300 PSI (20 bar).



QJ90-1-NYR

PART NUMBER	TO FIT
QJ90-1-NYR	Quick TeeJet

Adapters and Accessories ChemSaver® Check Valves



QJ90-2-NYR

- Fits standard Quick TeeJet bodies.
- Made of Nylon with CP19438-EPR gasket (included).
- Use with Quick TeeJet cap and gasket for automatic alignment when using flat fan spray tips.
- 90° included angle between outlets. When used with standard flat fan tips produces a twin type spray pattern for improved coverage and canopy penetration.



QJ90-2-NYR

PART NUMBER	TO FIT
QJ90-2-NYR	Quick TeeJet

22674-1/4-NYB

- Allows use of Quick TeeJet system with 1/4" NPT female connections.



22674-1/4-NYB

PART NUMBER	TO FIT
22674-1/4-NYB	1/4" (M) thread

QJ8355-NYB

- Allows use of Quick TeeJet system with 1/8" and 1/4" NPT female connections.
- Side mounting provides protection of the nozzle body.
- Features ChemSaver no-drip shutoff. Requires 10 PSI (0.7 bar) at the nozzle to open check valve.
- Standard diaphragm of EPDM with optional Viton available upon request.
- Maximum operating pressure of 300 PSI (20 bar).
- Flow rate: 2.25 GPM (8.5 l/min) at 5 PSI (0.34 bar) pressure drop, 3.18 GPM (12.0 l/min) at 10 PSI (0.69 bar) pressure drop.




QJ8355-NYB

PART NUMBER	TO FIT
QJ8355-1/8-NYB	1/4" (F)
QJ8355-1/4-NYB	1/4" (F)

In this type of nozzle body, the diaphragm check valve is an integral part of the nozzle assembly. This design eliminates the pressure drop associated with ball-type check valves. The spring-backed diaphragm ensures dependable closure. For maximum operating pressures of 125 PSI (9 bar).

- A-End Cap Subassembly
- B- Valve Set
- C-Strainer
- D-Orifice Disc and Core



8355

Made of Nylon with Nylon/polypropylene end cap assembly. Check valve opens at 10 PSI (0.7 bar) pressure. Choice of 1/8" or 1/4" NPT (F) inlet connections. Flow rate for 1/8" is 3 GPM at 5 PSI pressure drop (11.4 l/min at 0.34 bar). Flow rate for 1/4" is 3.9 GPM at 5 PSI pressure drop (15 l/min at 0.34 bar).



8355

PART NUMBER	DESCRIPTION
8355-1/8-NYB	Diaph. assembly, nylon
8355-1/4-NYB	Diaph. assembly, nylon

12328

Made of Nylon with Celcon® bonnet. Check valve opens at 7 PSI (0.5 bar) pressure. (M) inlet connection and (F) outlet connections. Choice of 1/2" and 3/4" NPT sizes. Flow rate for 1/2" is 12 GPM at 5 PSI pressure drop (45 l/min at 0.34 bar). Flow rate for 3/4" is 16 GPM at 5 PSI pressure drop (61 l/min at 0.34 bar).



12328-NYB

PART NUMBER	DESCRIPTION
12328-1/2-NYB	Diaph. check valve, nylon
12328-3/4-NYB	Diaph. check valve, nylon

8360

Made of Nylon with Nylon/polypropylene end cap assembly. Check valve opens at 10 PSI (0.7 bar) pressure. 1/4" NPT (M) inlet connection. Flow rate of 2.25 GPM at 5 PSI pressure drop (8.5 l/min at 0.34 bar).



8360

PART NUMBER	DESCRIPTION
8360- NYB	Diaph. assembly, nylon

ChemSaver® Diaphragm Check Valves



ChemSaver® Diaphragm Check Valve Nozzle Bodies

Similar in design and performance to the TeeJet® Diaphragm Check Valve nozzle bodies, but with pipe thread outlet connections for spray nozzles instead of TeeJet caps and spray tips. For maximum operating pressures of 125 PSI (9 bar).

4664B

Made in choice of brass or aluminum with replaceable stainless steel valve seat. Check valve opens at 7 PSI (0.5 bar) pressure. 1/8" NPT (F) inlet connection. Flow rate of 2.0 GPM at 5 PSI pressure drop (7.5 l/min at 0.34 bar).



4664B

4666B

Made in brass with replaceable stainless steel valve seat. 1/8" NPT (F) inlet and outlet connections. Flow rate of 2.0 GPM at 5 PSI pressure drop (7.5 l/min at 0.34 bar). Check valve opens at 7 PSI (0.5 bar) pressure.



4666B

6135A

Made of brass. Check valve opens at 7 PSI (0.5 bar) pressure. Choice of 1/4" and 3/8" NPT (F) inlet connections. Flow rate of 4.5 GPM at 5 PSI pressure drop (17 l/min at 0.34 bar).



6135A

6140A

Made of brass. Check valve opens at 7 PSI (0.5 bar) pressure. Choice of 1/4" and 3/8" NPT (F) inlet connections. Outlet connection has dual 1/2" NPT external (M) thread and 3/8" NPT internal (F) thread. Flow rate of 4.5 GPM at 5 PSI pressure drop (17 l/min at 0.34 bar).
















6140A

10742A

Made in choice of brass or aluminum. Check valve opens at 7 PSI (0.5 bar) pressure. 1/4" NPT (M) inlet and (F) outlet connections. Flow rate of 2.25 GPM at 5 PSI pressure drop (8.5 l/min at 0.34 bar).



10742A

CHEMSAVER DIAPHRAGM CHECK VALVES	EXPLODED VIEW															
 Brass	 CP6227-TEF Diaphragm Teflon® (optional) To be used with 4620 Diaphragm	 CP4620-FA Diaphragm Fairprene® or Viton	 9758 End Cap Subassembly Brass, Aluminum	 CP4624 Retainer Brass, Aluminum												
 Nylon	 CP6227-TEF Diaphragm Teflon (optional) To be used with CP21953 Diaphragm	 CP21953-EPR Diaphragm EPDM or Viton.	 21950-NYB ChemSaver End Cap Assembly Nylon/polypropylene	<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="background-color: #e91e63; color: white;">Part Number</th> <th style="background-color: #e91e63; color: white;">Approx. opening pressure</th> </tr> </thead> <tbody> <tr> <td>21950-2-NY</td> <td>2 PSI (0.14 bar)</td> </tr> <tr> <td>21950-8-NYB</td> <td>8 PSI (0.6 bar)</td> </tr> <tr> <td>21950-10-NYB</td> <td>10 PSI (0.7 bar)</td> </tr> <tr> <td>21950-15-NY</td> <td>15 PSI (1 bar)</td> </tr> <tr> <td>21950-20-NYB</td> <td>20 PSI (1.4 bar)</td> </tr> </tbody> </table>	Part Number	Approx. opening pressure	21950-2-NY	2 PSI (0.14 bar)	21950-8-NYB	8 PSI (0.6 bar)	21950-10-NYB	10 PSI (0.7 bar)	21950-15-NY	15 PSI (1 bar)	21950-20-NYB	20 PSI (1.4 bar)
Part Number	Approx. opening pressure															
21950-2-NY	2 PSI (0.14 bar)															
21950-8-NYB	8 PSI (0.6 bar)															
21950-10-NYB	10 PSI (0.7 bar)															
21950-15-NY	15 PSI (1 bar)															
21950-20-NYB	20 PSI (1.4 bar)															
 QJS	 CP56709-EPDM Diaphragm EPDM or Viton	 56714-NYB End Cap Subassembly	 CP56711-NYB Retaining Ring													

TeeJet Specialty Fittings




Plug Valve

A compact quarter turn on-off valve for many applications. Low-profile handle is suited for use on airblast sprayers. Maximum operating pressure of 400 PSI (28 bar). Brass with Celcon® handle.



PART NUMBER	DESCRIPTION
PLUG VALVE	
23220-1/4F x 1/4F	1/4" (F) x 1/4" (F)
23220-1/8F x 1/8F	1/8" (F) x 1/8" (F)
23220-1/4M x T	1/4" (M) x 11/16"-16 (M)
23220-1/4F x T	1/4" (F) x 11/16"-16 (M)
23220-1/4M x 1/4F	1/4" (M) x 1/4" (F)
23220-1/4F x 1/4M	1/4" (F) x 1/4" (M)

Typical Assembly with Ceramic Disc and Core

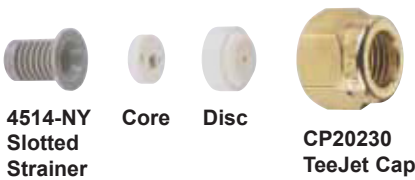

Nozzle Body ChemSaver® Check Valves

55295 e-ChemSaver® Electric Solenoid Shutoff

55295



The 55295 e-ChemSaver is a solenoid actuated shutoff compatible with a wide range of TeeJet nozzle bodies equipped with a diaphragm check valve. It can be used for end of boom nozzles as well as individual tip shutoff and PWM controls.

- Valve is normally closed and opens when solenoid is energized.
- Wetted materials include stainless steel and Viton®.
- Use with most diaphragm check valve equipped TeeJet nozzle bodies.
- 100 PSI (6.8 bar) maximum spraying pressure at minimum voltage (12V or 24V).
- 0.6 GPM (2.27 l/min) at 5 PSI (0.34 bar) pressure drop and 0.8 GPM (3.0 l/min) at 10 PSI (0.7 bar) pressure drop.
- ¼ second response time.
- Offered in 12- or 24-Volt DC version.
- 2-Pin MetriPack connector molded into body for a clean, weather-tight electrical connection.

55300 Air ChemSaver Shutoff

55300 ChemSaver Air Shutoff Valve is designed as a pneumatic valve for use on Quick TeeJet® nozzle assemblies. Air pressure is used to open the valve and a spring is used to close the valve.

- Wetted materials include polypropylene, Kynar® and Viton.
- 45 PSI (3.1 bar) minimum air pressure.
- 150 PSI (10 bar) maximum liquid pressure.
- Air inlet fitting swivels around body and accepts 6 mm push-to-connect fittings for fast installation.
- Valve is normally closed.
- Very low air consumption per cycle reduces load on air supply system.

55300



58140 ChemSaver Manual Shutoff

Use with any application where individual shutoff is important such as golf course and estate sprayers.

- Fits any Quick TeeJet nozzle body with diaphragm check valve.
- With retaining ring in fully open position functions like a standard 10 PSI (0.7 bar) diaphragm check valve.
- With retaining ring in fully closed position all flow through nozzle body is shut off.
- 150 PSI (10 bar) maximum pressure rating.
- Nylon construction.

58140



TeeJet Row Application Kit



The 23770 Adjustable Row Application Kit is for Applying Post-emergence Chemicals Over Crop Rows

Features:

- Arms adjustable for length and angle without removing bolts; simply loosen.
- Available with stainless steel arms.
- Positioning one arm at proper angle automatically sets correct angle of second arm.
- Fits square or round booms up to 1-1/2" diameter.
- Kit includes standard and Quick TeeJet® nozzle bodies.
- Side nozzle bodies may be rotated.
- Maximum pressure of 125 PSI (9 bar).
- Spray tips and strainers not included.




23770-SS

TeeJet Hose Drops

Hose drops connect to standard and Quick TeeJet nozzle bodies and can also be used with swivels. Available in 159 (380 mm) and 24" (610 mm) lengths. Maximum operating pressure of 125 PSI (9 bar).

Note: QJ1/4T-NYB can be attached to hose drops for use with Quick TeeJet caps

QJ1/4T-NYB

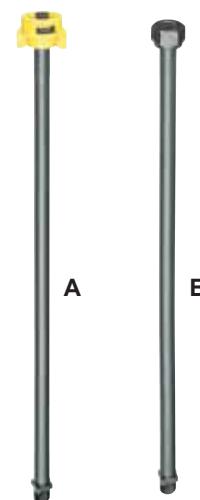

ITEM	HOSE DROP NUMBER	LENGTH	INLET CONNECTION	OUTLET CONNECTION	MATERIAL
HOSE DROPS					
A	21353-6-15-NYB	15" (380 mm)	Quick TeeJet Type	1/49 NPT (M)	Nylon with Quick TeeJet cap and EPDM gasket
	21353-6-24-NYB	24" (610 mm)			
B	21354-15-NYB	15" (380 mm)	11/16"-16 TeeJet Thread		Nylon
	21354-24-NYB	24" (610 mm)			

Quick TeeJet® Swivel Nozzle Bodies

QJ8600 swivel Quick TeeJet nozzle body assemblies provide the same spray tip adjustability of a standard TeeJet threaded swivel plus the quick change and self-aligning features of the Quick TeeJet System.

PART NUMBER	DESCRIPTION	MATERIAL
QUICK TEEJET® SWIVEL NOZZLE BODIES		
QJ8600-2-1/4-NYB	1/4" NPT (F)	Nylon
QJ8600-1/4-NYB	1/4" NPT (F)	Nylon



QJ8600-2-1/4-NYB
Double Swivel Nozzle



QJ8600-1/4-NYB
Single Swivel Nozzle

TeeJet Swivel Nozzle Bodies



Swivel Nozzle Bodies

TeeJet swivel nozzle bodies are primarily for use with tips employed in row crop spraying. A locknut holds swivel bodies firmly in position at selected spray projection angle so they are not affected by jarring and vibration. For use at pressures up to 125 PSI (9 bar).



5000-1/4T



5540-1/4TT



4202-2-1/4T



6240-1/4TT



7450-2T



5932-2-1/4T



8600-1/4T-NYB



8600-2-1/4T-NYB



7620-T

How to Order:

Examples:

5000-1/4T Brass NPT

Note: Swivels do not include tips, strainers or caps.

PART NUMBER	Description	INLET CONNECTION	MATERIAL	SWIVEL ARC RANGE
SWIVEL NOZZLE BODIES				
5000-1/4T	Type 5000 Single Swivel Nozzle	1/4" NPT (F)	Brass	280°
5540-1/4TT	Type 5540 Single Swivel Nozzle	1/4" NPT (M)	Brass	280°
4202-2-1/4T	Type 4202 Double Swivel Nozzle	1/4" NPT (F)	Brass	280°
6240-1/4TT	Type 6240 Double Swivel Nozzle	1/4" NPT (M)	Brass	280°
7450-2T	Type 7450 Compact Double Swivel Nozzle	1/4" NPT (F)	Brass	280°
5932-2-1/4T	Type 5932 Double Swivel Nozzle 1/4" NPT female bottom outlet	1/4" NPT (F)	Brass	280°
8600-1/4T-NYB	Type 8600 Nylon Single Swivel Nozzle	1/4" NPT (F)	Nylon	280°
8600-2-1/4T-NYB	Type 8600-2 Nylon Double Swivel Nozzle	1/4" NPT (F)	Nylon	280°
7620-T	Type 7620 Compact Single Swivel Nozzle	1/4" NPT (F)	Brass	360°

TeeJet Hose Shank Nozzle Bodies



Hose Shank Nozzle Bodies



Single Hose Connection

8121-NYB-406TD

PART NUMBER	TO FIT Hose ID	MATERIAL
6471B-400TD	1/4"	Brass
8121-NYB-406TD	3/8"	Nylon
8121-NYB-540TD	1/2"	Nylon
9191B-531TD	1/2"	Brass



Double Hose Connection

8120-NYB-406TD

PART NUMBER	TO FIT Hose ID	MATERIAL
6472B-400TD	1/4"	Brass
8120-NYB-406TD	3/8"	Nylon
8120-NYB-540TD	1/2"	Nylon
9192B-531TD	1/2"	Brass



Triple Hose Connection

8124-NYB-406TD

PART NUMBER	TO FIT Hose ID	MATERIAL
8124-NYB-406TD	3/8"	Nylon
8124-NYB-540TD	1/2"	Nylon

Split Eyelet Nozzle Bodies

For Wet Booms

- Mounting on 1/2", 3/4" or 1" pipe or tubing.
- 25775-NYB mounts to 3/8" (9.5 mm) hole drilled in pipe or tubing.
- 7421 mounts to 9/32" (7.2 mm) hole drilled in pipe or tubing.
- 25775-NYB and 7421 feature 11/16"-16 TeeJet threaded outlets.
- 25888-NYB features 1/4" (M) NPT threaded outlet.



25775-3/4T-NYB

25775-NYB

Operating pressures up to 150 PSI (10 bar)

PART NUMBER	MATERIAL	TO CLAMP ON
25775-1/2T-NYB 25888-1/2-NYB	Nylon	1/2" Pipe 13/16" O.D. Tubing 7/8" O.D. Tubing
25775-3/4T-NYB 25888-3/4-NYB	Nylon	3/4" Pipe 1" O.D. Tubing 11/16" O.D. Tubing
25775-1T-NYB 25888-1-NYB	Nylon	1" Pipe 1-1/4" O.D. Tubing 1-3/8" O.D. Tubing

How to Order:

Specify split eyelet assembly number.
Examples: 7421-1/2T-SS
25775-1/2T-NYB



7421-3/4T

7421

Operating pressures up to 250 PSI (17 bar)

PART NUMBER	MATERIAL	TO CLAMP ON
7421-1/2T	Brass	1/2" Pipe
7421-1/2T-SS	Stainless Steel	13/16" O.D. Tubing 7/8" O.D. Tubing
7421-1/2T-NYB	Nylon	
7421-3/4T	Brass	3/4" Pipe
7421-3/4T-SS	Stainless Steel	1" O.D. Tubing 1-1/16" O.D. Tubing
7421-3/4T-NYB	Nylon	
7421-1T	Brass	1" Pipe
7421-1T-SS	Stainless Steel	1-1/4" O.D. Tubing 1-3/8" O.D. Tubing
7421-1T-NYB	Nylon	

TeeJet Nozzle Parts



TeeJet Spray Nozzle



11750 TeeJet Check Valve

For larger capacity TeeJet nozzles where strainers are not required. Ball check opens at 5 PSI (0.34 bar), 10 PSI (0.7 bar) spring also available. Recommended for flow rates from .40 to 1.5 GPM (1.5–5.7 l/min). Made in choice of stainless steel, brass, aluminum or polypropylene with stainless steel ball and spring.



TeeJet Nozzle Bodies



BODY NUMBER	NOZZLE TYPE	MALE SIZE	MATERIAL
CP1336	1/8TT	1/8"	Brass
CP1322	1/4TT	1/4"	Brass
CP8028-NYB	1/4TT-NYB	1/4"	Nylon
CP1322-I	1/4TT-I	1/4"	Steel
CP1322-SS	1/4TT-SS	1/4"	Stainless Steel
CP1324	3/8TT	3/8"	Brass
CP1340	1/2TT	1/2"	Brass
CP3818	3/4TT	3/4"	Brass
CP3818-SS	3/4TT	3/4"	Stainless Steel



BODY NUMBER	NOZZLE TYPE	MALE SIZE	MATERIAL
CP1335	1/8T	1/8"	Brass
CP1321	1/4T	1/4"	Brass
CP12094-NYB	1/4T-NYB	1/4"	Nylon
CP1321-I	1/4T-I	1/4"	Steel
CP1321-SS	1/4T-SS	1/4"	Stainless Steel
CP1323	3/8T	3/8"	Brass
CP1339	1/2T	1/2"	Brass
CP3817	3/4T	3/4"	Brass
CP3817-SS	3/4T	3/4"	Stainless Steel

TeeJet Nozzle Caps

Secure interchangeable TeeJet tips to the various nozzle bodies. 18032A-NYB winged TeeJet cap allows quick change of spray tips with no tool required.



CAP NUMBER	DESCRIPTION
CP1325	Brass
CP8027-NYB	Nylon
CP8027-1-NYB	Nylon (Extra-long size)
CP1325-AL	Aluminum
CP1325-SS	Stainless Steel
CP18032A-NYB	Winged Cap, Nylon
CP3819	Brass, use with 3/4T and 3/4TT body
CP3819-SS	Stainless Steel, use with 3/4T and 3/4TT body
CP20230	Brass, use with ceramic disc-cores

45° Nozzle Body

Ideal for use with FullJet®, FloodJet® and Turbo FloodJet® nozzles. Can be used with QJ4676 Quick TeeJet® cap or standard 4676 outlet adapter. Made of polypropylene.



BODY NUMBER	INLET	OUTLET
22669-1/4-PPB	1/4"(M)	11/16"–16 (M)

Clamp Assemblies

Consist of upper and lower clamps and bolt for use with hose shank nozzle bodies.



PART	TO CLAMP ON
AA111-1/2	1/2" Pipe (1-3/16" & 7/8" O.D. Tubings)
AA111-3/4	3/4" Pipe (1" & 1-1/16" O.D. Tubings)
AA111-1	1" Pipe (1-1/8", 1-1/4" & 1-3/8" O.D. Tubings)
AA111-1-1/4	1-1/4" Pipe (1-1/16" & 1-11/16" O.D. Tubings)



PART	TO CLAMP ON
AA111SQ-1	1" Square Tubing
AA111SQ-1-1/4	1-1/4" Square Tubing
AA111SQ-1-1/2	1-1/2" Square Tubing

TeeJet Nozzle Parts



Pipe Plugs

How to Order:

Specify part number.
Example: 8400-3/8-NYB Nylon



8400-1/4-PPB

NUMBER	THREAD	MATERIAL
8400-1/4-PPB	1/4" NPT	Polypropylene
8400-3/8-NYB	3/8" NPT	Nylon
8400-1/2-NYB	1/2" NPT	Nylon
8400-3/4-NYB	3/4" NPT	Nylon

Plug Tip

CP3942 plug tip is used to temporarily shut off selected nozzles by replacing spray tips with these plug tips. Quick, easy way to change spacing of nozzles along boom. Materials: brass, aluminum or stainless steel.

PLUG TIP NUMBER	MATERIAL
CP3942	Brass
CP3942SS	Stainless Steel



CP3942

TeeJet Hose Shanks

For attaching hose to nozzle body. Fits all standard TeeJet nozzle caps, replacing spray tips. Type 4251 is available in choice of brass or stainless steel. Type 8400 is made of Nylon.

How to Order:

Specify hose shank number.
Example: 8400-406-NYB
Example: 4251-250 Brass

NYLON HOSE SHANK NUMBER	FOR HOSE I.D.
8400-406-NYB	3/8"
8400-500-NYB	1/2"



8400-406-NYB

HOSE SHANK NUMBER	FOR HOSE I.D.
4251-250	1/4"
4251-312	5/16"
4251-400	3/8"
4251-437	7/16"
4251-500	1/2"



4251-400

Hose Shank Adapters

8400-1/4-406-NYB



CONNECTOR NUMBER	NPT THREAD	HOSE I.D.	MATERIAL
8400-1/4-406-NYB	1/4"	3/8"	Nylon
8400-1/4-535-NYB	1/4"	1/2"	Nylon
8400-3/8-406-NYB	3/8"	3/8"	Nylon
8400-3/8-535-NYB	3/8"	1/2"	Nylon
8400-1/2-406-NYB	1/2"	3/8"	Nylon
8400-1/2-535-NYB	1/2"	1/2"	Nylon
8400-3/4-785-NYB	3/4"	3/4"	Nylon
8400-T-406-NYB TeeJet Body w/ hose shank connection	Fits Teejet Cap	3/8"	Nylon

13434-406-NYB



CONNECTOR NUMBER	NPT THREAD	HOSE I.D.	MATERIAL
13434-406-NYB	1/4" (F)	3/8"	Nylon
13437-540-NYB	1/4" (F)	1/2"	Nylon

13435-406-NYB



CONNECTOR NUMBER	NPT THREAD	HOSE I.D.	MATERIAL
13435-406-NYB	1/4" (F)	3/8"	Nylon
13438-540-NYB	1/4" (F)	1/2"	Nylon

13436-406-NYB



CONNECTOR NUMBER	NPT THREAD	HOSE I.D.	MATERIAL
13436-406-NYB	1/4" (F)	3/8"	Nylon
13439-540-NYB	1/4" (F)	1/2"	Nylon